

# WAT-1200CS 1/3.2" High Sensitivity Miniature Camera with Day/Night

Day/Night camera for general surveillance


**NEW**



## Key features

- High sensitivity min. illumination 0.002 lx F1.2 (AGC ON=54dB, Shutter=OFF)
- Ultra-compact design only 26 x 26 x 30 mm
- Wide dynamic range, ICR Mechaless Day/Night function
- A dual-band pass filter allows the ability to view a scene with 850nm IR illumination at night  
※Advanced setting available by OSD (On Screen Display) through an optional remote control

## Dimensions

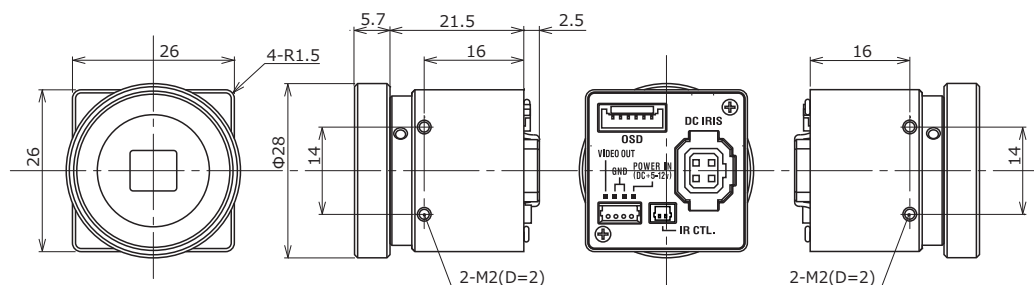

## Specifications

		NTSC	PAL
Video standard		NTSC	PAL
Pick-up element		1/3.2 inch BSI CMOS image sensor	
Number of effective pixels		1280(H) × 960(V)	1280(H) × 924(V)
Unit cell size		3.5μm(H) × 3.5μm(V)	
Imaging system		RGB+W array mosaic filters on chip	
Synchronizing system		Internal	
Scanning system		Progressive	
Video output		Composite: 1.0 V(p-p) 75Ω (Unbalanced)	
Resolution (H)		More than 750TVL (Center)	
Minimum illumination		0.002 lx F1.2 (AGC ON=54dB, Shutter=OFF)	
S/N		More than 55dB (AGC OFF=0dB, γ=1.0)	
Function settings		OSD : Remote controller	
AE mode	Fixed	1/50 sec.	
	EI	1/100,1/120, 1/125, 1/250, 1/500, 1/100, 1/2000, 1/4000, 1/8000, 1/10000, 1/20000, 1/50000, 1/100000 sec.	1/60 - 1/100000 sec.
White balance		ATW, AWB, PWB, MWB, PRESET (5100K, 6300K)	
AGC	ON	0 - 54dB	
	OFF	0dB	
MGC		0 - 54dB (6dB step)	
Day/Night		ICR mechaless Auto, Manual	
Gamma characteristics		γ≈0.45	
Video level		Adjustable	
Noise reduction		2DNR OFF/ON Level adjustable	
Wide dynamic range		WDR OFF/ON Level adjustable, D-WDR OFF/ON Level adjustable	
Lens iris		DC	
Back light compensation		BLC, HSBLC	
White blemish correction		-	
Sharpness		Level adjustable	
Defog		OFF/ON Level adjustable	
Digital zoom		-	
Privacy mask		16 masks	
Mirror image		OFF, V-FLIP, H-FLIP, HV-FLIP	
Freeze		-	
Motion detection		-	
Neg.image		-	
Interface		4P connector (Composite Video, Power in), Auto iris, 2P connector (IR light ctl), Remote control (RC-01)	
Power supply		DC+5V - 12V	
Power consumption		0.6W/120mA (DC+5V), 0.72W/60mA (DC+12V)	
Operating temperature		-10 - +50°C	
Storage temperature		-30 - +70°C	
Operating / Storage humidity		95% RH or less (Without condensation)	
Lens mount		CS mount	
Weight		Approx. 22g	
Accessories		AIC-G (Iris plug), 4P cable, 2P cable, Hex. wrench, Camera bracket	

Accessories
  Options

**WAT-1200CS**

**CS-mount lenses**

M13VG288IR      M13VG850IR  
 AG3Z2812FCS-MPWIR    AG4Z1214FCS-MPIR

**C-mount adaptor**

C-mount lenses  
※Not in our lineup


30CMA-R

**Stand**

MS50

**Camera bracket**

B005



**Remote control**

RC-01

**2P cable (300mm)**

**4P cable (300mm)**

VIDEO OUT

POWER IN (5-12V)

**Cable with connectors**

CB-01

**Power supply adaptors**

SWI12-12-N-P5

SWI12-12-E-P5

**VIDEO OUT (BNC)**

**VIDEO OUT (RCA)**

Monitor  
※Not in our lineup

**Cable**

- 1.5C2V (BNC/BNC)
- 3C2V (BNC/BNC)
- 3C2V (BNC/RCA)

**POWER IN (DC12V)**